



HOSE SOLUTIONS FOR DIVERSE APPLICATIONS
(949) 529-0411 | www.finehose.com

PREMIUM DISCHARGE HOSE

Great for irrigation, Sump Pump, Agriculture, and Industrial




It can withstand a working pressure of 90 PSI and can be used in a temperature range of 23°F to 150°F (-5°C to 65°C)

Size	Diameter	2Bar	3Bar	4Bar	6Bar	8Bar	10Bar
Inch	(mm)	Kg/m	Kg/m	Kg/m	Kg/m	Kg/m	Kg/m
1"	325.4±1.3	0.12	0.13	0.14	0.155	0.17	0.185
1-1/4"	31.8±1.3	0.14	0.15	0.175	0.195	0.21	0.23
1-1/2"	38.1±1.5	0.18	0.2	0.24	0.27	0.3	0.32
2"	50.3±2.0	0.24	0.3	0.35	0.375	0.39	0.42
2-1/2"	63.5±2.3	0.32	0.38	0.45	0.48	0.52	0.55
3"	76.2±2.3	0.38	0.47	0.57	0.63	0.69	0.75
4"	101.6±2.5	0.52	0.58	0.72	0.8	0.9	1.05
5"	121.0±2.8	0.75	0.85	0.95	1.1	1.2	1.55
6"	152.4±3.0	0.9	1.05	1.2	1.4	2.1	2.9
8"	203.2±3.5	1.45	1.55	1.7	1.9	2.6	3.6
10"	254.1±4.0	2.3	2.5	2.75	3.0		
12"	304.8±4.5	3.0	3.6	4.0			
14"	355.6±5.0	4.0	5.0	5.6			
16"	400.6±5.5	5.2	5.8	6.5			



Lay Flat Water Pump Discharge Hose With Aluminum Pin Lug Fittings

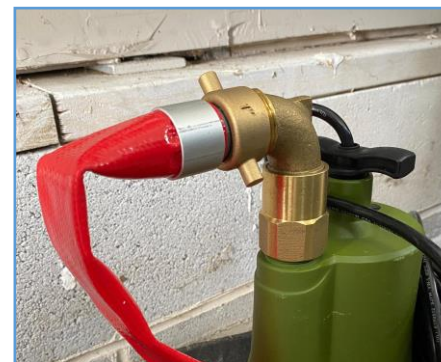

This discharge hose is constructed from durable PVC, with extra-tough braided reinforcement for a long service life. The hose rolls flat for easy storage in any shop or garage.

Application: Water transfer in construction, irrigation, agriculture, and light industrial
Aluminum Female Thread Brass Nut with dual handles + Male Thread Assembly
Hose Working Temperature: 23°F ~ 150°F
Select from Blue Polyester yarn reinforced lay-flat PVC Hose from 25 ft. to 100 ft.

Item name	Material	W.P.	B.P.	Size
Discharge Hose	Cotton Silk And PVC	60Psi	180Psi	1"
Discharge Hose	Cotton Silk And PVC	60Psi	180Psi	2"
Discharge Hose	Cotton Silk And PVC	60Psi	180Psi	3"

Lay Flat Discharge Hose With Aluminum Camlock C & E Fittings

Made of flexible PVC material reinforced with a continuous high tensile strength polyester yarn circularly woven to prevent leaks and tears for durable use. Heavy-duty connectors (aluminum Camlock C and E fittings) prevent oxidation and rust.



Wide Applications for Swimming Pools, Agriculture, Construction

Item name	Material	W.P.	B.P.	Size
Discharge Hose	Cotton Silk And PVC	60Psi	180Psi	1"
Discharge Hose	Cotton Silk And PVC	60Psi	180Psi	2"
Discharge Hose	Cotton Silk And PVC	60Psi	180Psi	3"





This PVC Suction/Intake hose is internally wire-reinforced to prevent collapse. Smooth inside walls deliver maximum flow with reduced turbulence. The suction hose maintains high flexibility even in extreme temperatures.


Suction/Intake Hose

Smooth walls for increased flow
Wire-reinforced PVC construction won't collapse during use
Corrosion-resistant brass swivel nut
Rugged die-cast aluminum threaded connector
Heavy-duty stainless steel hose clamps



Item name	Material	Size
Suction Hose	Wire Reinforced PVC	1"
Suction Hose	Wire Reinforced PVC	1.25"
Suction Hose	Wire Reinforced PVC	1.5"
Suction Hose	Wire Reinforced PVC	2"
Suction Hose	Wire Reinforced PVC	2.5"
Suction Hose	Wire Reinforced PVC	3"
Suction Hose	Wire Reinforced PVC	4"

High-Volume Watering Kit with Adjustable Spray Nozzle

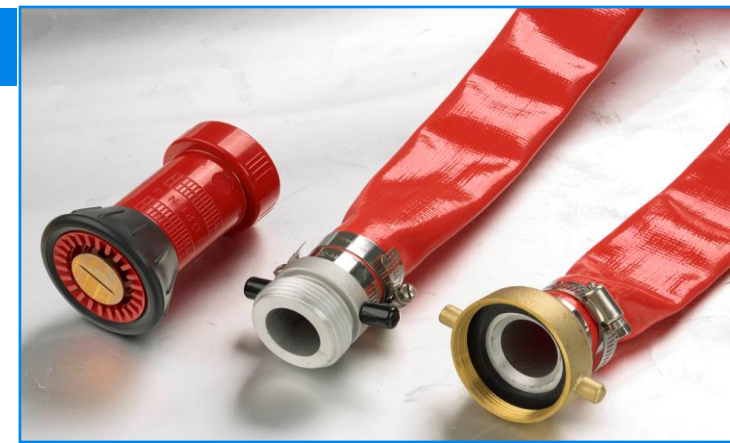


High Volume Watering Kit is perfect for wetting down dirt on job sites and other situations where large amounts of water need to be quickly delivered over a large area. The included 100 ft. hose with adjustable spray nozzle disperses water up to 25 ft. high and as far as 50 ft. With a flow rate of 93 GPM and up to 100 PSI there's more than enough pressure to get the job done.



2" Pin Lug Female 2" Pin Lug Male

Hose Diameter	Fitting Size	Coupling Material	Hose Length	Discharge Flow
1.5"	2"	Aluminum	100 FT	93 GPM

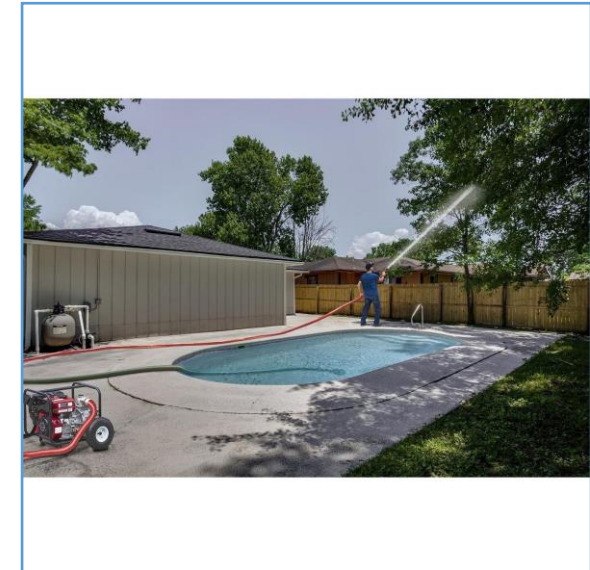

Made of high-quality PVC lined material, reinforced with extra-strong polyester yarn for maximum durability and longevity.



This lay flat hose is available in diameters from 1" to 6" and 30 feet to 100 feet in length, with a 120 PSI working pressure and 250 PSI burst pressure. It has a working temperature range of -40°F to 185°F, ensuring its usability in a variety of conditions.

Hose Inside Diameter



3.00 in

Hose Width When Laid flat



4.71 in

Diameter size to Flat size

1.5 in — 2.36 in

2.00 in — 3.14 in

2.50 in — 3.93 in

3.00 in — 4.71 in

4.00 in — 6.28 in

5.00 in — 7.85 in

6.00 in — 9.42 in





PROFESSIONAL HOSE MANUFACTURER

Taixu Group
18103 Sky Park Cir #B2
Irvine, CA 92614



949-529-0411

949-329-4298



sales@finehose.com



www.finehose.com

