


Submersible Utility Pumps

1/4HP
1600GPH

- Ideal for draining shallow water-flooded areas such as basements and boats
- Oil-Free Reinforced Thermoplastic Submersible Utility Pump
- Corrosion-Resistant Reinforced Thermoplastic Housing, Volute And Impeller
- Bottom Suction Design Filters Debris and Removes Water Down To 1/8" Of Surface
- 1" NPT discharge ; 1" Female adapter included
- 3/4" Garden Hose Thread



PERFORMANCE CURVES

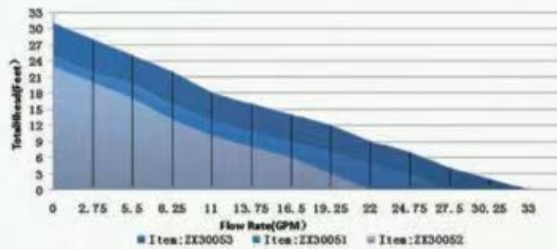

Item	Volts/Hz	HP	Discharge	Max. Flow	Max. Lift	G. W./N. W	CTN SIZE
ZX30051	115/60	1/4	1-1/4"NPT	27 GPM	25 FT	3.00/2.70kg	24.5x16.5x41cm
ZX30052	115/60	1/5	1-1/4"NPT	23 GPM	23 FT	2.80/2.50kg	24.5x16.5x41cm
ZX30053	115/60	1/3	1-1/4"NPT	33 GPM	31 FT	3.80/3.00kg	24.5x16.5x41cm


Submersible Utility Pumps

1/3HP
1980GPH

- Ideal for draining shallow water-flooded areas such as basements and boats
- Oil-Free Reinforced Thermoplastic Submersible Utility Pump
- Corrosion-Resistant Reinforced Thermoplastic Housing, Volute And Impeller
- Bottom Suction Design Filters Debris and Removes Water Down To 1/8" Of Surface
- 1" NPT discharge ; 1" Female adapter included
- 3/4" Garden Hose Thread



PERFORMANCE CURVES

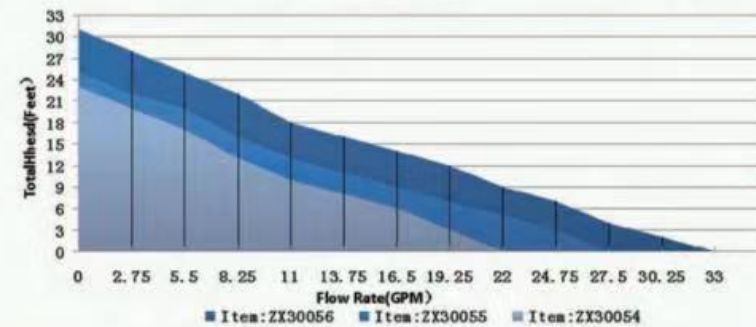

Item	Volts/Hz	HP	Discharge	Max. Flow	Max. Lift	G. W./N. W	CTN SIZE
ZX30054	115/60	1/5	1-1/4"NPT	23 GPM	23 FT	2.80/2.50kg	24.5x16.5x41cm
ZX30055	115/60	1/4	1-1/4"NPT	27 GPM	25 FT	3.00/2.70kg	24.5x16.5x41cm


Sewage/Effluent Pump



- Ideal for basements needing water drainage
- Designed For Easy Installation Without Any Plumbing Changes
- 115 volt Permanent Split Capacitor (PSC) motor with thermal overload protection
- Oil-filled, thermally protected motor prevent overheating which extends pump life
- Stainless steel motor shaft
- upper and lower ball-bearing construction
- Mechanical carbon/ceramic shaft seal
- Durable cast iron housing & volute and base
- Vortex impeller
- Solids handling up to 2 inch diameter
- 2" NPT discharge
- SJTW Power cord with length of 10 ft or 20ft



PERFORMANCE CURVES

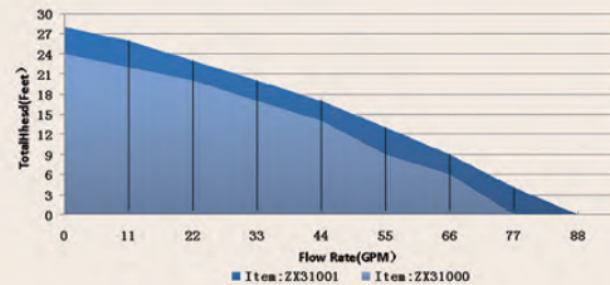

Item	Volts/Hz	HP	Discharge	Max. Flow	Max. Lift	G. W/N. W	CTN SIZE/1pc
ZX31000	115/60	1/2	2" NPT	78 GPM	24 FT	11.50/10.60kg	24x17x41cm
ZX31001	115/60	3/4	2" NPT	87 GPM	28 FT	12.00/11.00kg	24x17x41cm

Non-Submersible, Self-Priming Transfer Utility Pump


Ideal for flooded basements, watering lawns and draining water heaters. Can also be used to boost water pressure for washing vehicles, sidewalks and more.

Features:

- Strong, stable and secure connections
- Non-submersible, in-line, portable utility transfer pump with rugged one-piece cast iron housing and integral carrying handle
- Self-priming to 15' when priming chamber is filled
- Can also be used to boost water pressure for washing vehicles, sidewalks and more
- Convenient 3/4" brass garden hose adapters on intake and discharge



PERFORMANCE CURVES

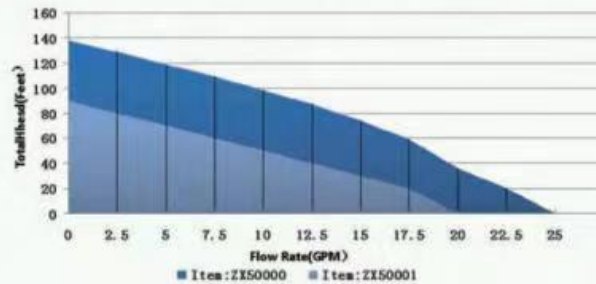


Item	Volts/Hz	HP	Discharge	Max. Flow	Max. Lift	G. W/N. W	CTN SIZE/2pcs
ZX50000	115/60	1/2	3/4" GHT	25 GPM	140 FT	18.50/17.20kg	40x32x28cm
ZX50001	115/60	1/2	3/4" GHT	20 GPM	90 FT	18.00/17.00kg	40x32x28cm

Condensate Pump with Safety Switch


- Pumps up to 80 GPH
- Reinforced, corrosion-resistant, thermoplastic condensate pump
- 3/8" discharge with built-in check valve
- safety switch shuts down appliance during power outages
- designed for easy installation in new or existing applications
- Transfers condensation from A/C and HVAC systems to a nearby drain



PERFORMANCE CURVES

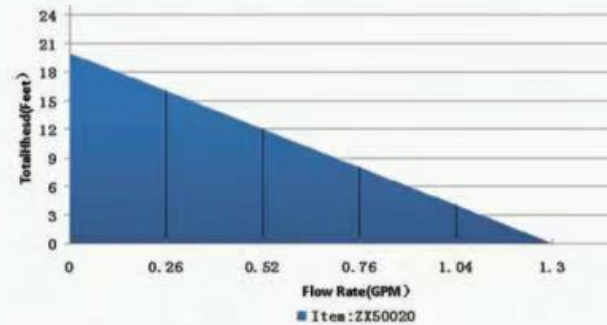

Item	Volts/Hz	HP	Discharge	Max. Flow	Max. Lift	G. W/N. W	CTN SIZE/1pc
ZX50020	115/60	1/30	3/8"	1.3 GPM	20 FT	2.08/1.50kg	25x14x11cm

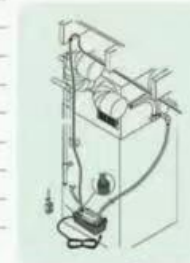

Lawn Pump

**ANSI/NSF61&ANSI/NSF372
certification for drinking water**

Drinking water Shallow well Pump

Extract water from underground sources with this shallow well pump.

- The pump housing is made of solid steel for maximum durability
- The automatic pressure booster is designed for continuous operation so you can handle big jobs quickly
- The shallow well pump restarts automatically as soon as pressure drops
- 1 in. NPT suction and discharge threads
- 6.3gallon diaphragm pressure tank
- Stainless steel housing and volute
- Thermal protection with automatic reset
- Stainless steel construction prevents rust contamination and ensures cleaner, healthier drinking water



Item	Volts/Hz	HP	Discharge	Max.Flow	Max.Lift	Max.Suction	Pressure switch ON/OFF	G. W/N. W	CTN SIZE/1pc
ZX51100	115/60	1/3	1"NPT	12 GPM	75 FT	26 FT	20/35 psi	9.00/8.00kg	44. 5x28. 5x52. 5cm
ZX51101	115/60	1/2	1"NPT	13 GPM	80 FT	26 FT	20/35 psi	10.00/9.00kg	44. 5x28. 5x52. 5cm
ZX51102	115/60	3/4	1"NPT	15 GPM	95 FT	26 FT	20/35 psi	11.00/10.00kg	44. 5x28. 5x52. 5cm
ZX51000	115/60	1	1"NPT	16 GPM	100 FT	26 FT	20/35 psi	12.00/11.00kg	44. 5x28. 5x52. 5cm


Non-Submersible, Self-Priming Transfer Pump Utility Pumps

Lightweight 12V or 24 volt DC pump

- Non-submersible
- Self-priming for instant delivery or de-watering up to 6'
- Convenient connection to 12 volt or 24 volt battery
- Portable and lightweight transfer pump you can take anywhere
- Removes water down to 1/8 in. of surface (when water suction attachment is connected)
- Corrosion –resistant chrome plated bronze volute with 3/4 inch hose fitting
- Rugged metallic handle for easy portability
- Includes pump, Suction Attachment , 6' Hose and repair kit



PERFORMANCE CURVES

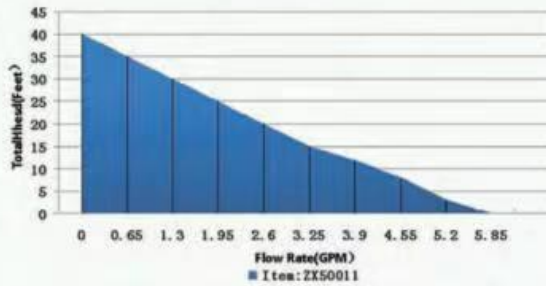

Item	Volts/Hz	Discharge	Max. Flow	Max. Lift	G. W./N. W	CTN SIZE
ZX50011	12/24	3/4" GHT	6 GPM	40 FT	11.50/11.20kg	45.5x45.5x17cm

Non-Submersible Self-Priming Transfer Utility Pumps


This lightweight 115 volt AC pump can be used to empty water beds, drain water heaters or aquariums, and other applications where water needs to be transferred.

Features:

- Non-submersible
- Self-priming for instant delivery or de-watering up to 6'
- Portable and lightweight transfer pump you can take anywhere
- Removes water down to 1/8 in. of surface (when water suction attachment is connected)
- Corrosion –resistant chrome plated bronze volute with 3/4 inch hose fitting
- Rugged metallic handle for easy portability
- Includes pump, Suction Attachment , 6' Hose and repair kit



PERFORMANCE CURVES

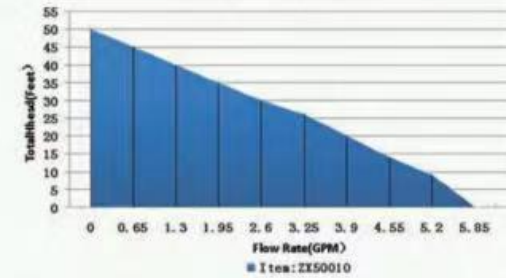


Item	Volts/Hz	HP	Discharge	Max. Flow	Max. Lift	G. W./N. W	CTN SIZE/4pcs
ZX50010	115/60	1/12	3/4" GHT	6 GPM	40 FT	11.50/11.20kg	45.5x45.5x17cm

Shallow Well Pump

- Shallow Well Pump with Pressure Control Switch
- For use in residential portable water systems, pumping drinking water from shallow wells and cisterns irrigation systems. Fully automatic operation with pressure switch 30 PSI on - 50 PSI off
- Heavy-duty cast iron pump housing
- Powerful and quiet operation
- High output flow within full pressure range Reliable 1 HP motor



PERFORMANCE CURVES

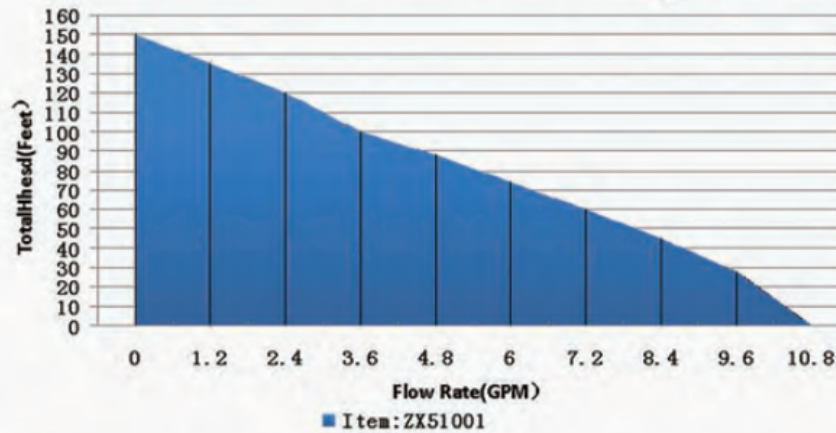

Item	Volts/Hz	HP	Discharge	Suction	Max. Flow	Max. Lift	G. W/N. W	CTN SIZE/1pc
ZX51001	115/60	1	1" NPT	1-1/4" NPT	10.5 GPM	150 FT	16.00/14.50kg	41.8x32.5x25.8cm

1/3HP
3000GPH

Pedestal Sump Pump

- Ideal for basements needing frequent drainage.
- Quick and Easy Installation
- Fits 12" diameter x 24" deep or Larger Sump Pits
- Split-Phase Motors mean No Starting Switches or Relays Required
- Thermal Overload Protected
- Adjustable Float Switch
- Top-Screened Inlet to Reduce Clogging
- Solids handling up to 1/4 inch diameter
- 1-1/2" NPT discharge
- SJTW Power cord with length of 8 ft or 16ft



ZX30092 / ZX30093

ZX30090 / ZX30091

PERFORMANCE CURVES

